
# Portable Mini Light Tower

GHSL PLT-252

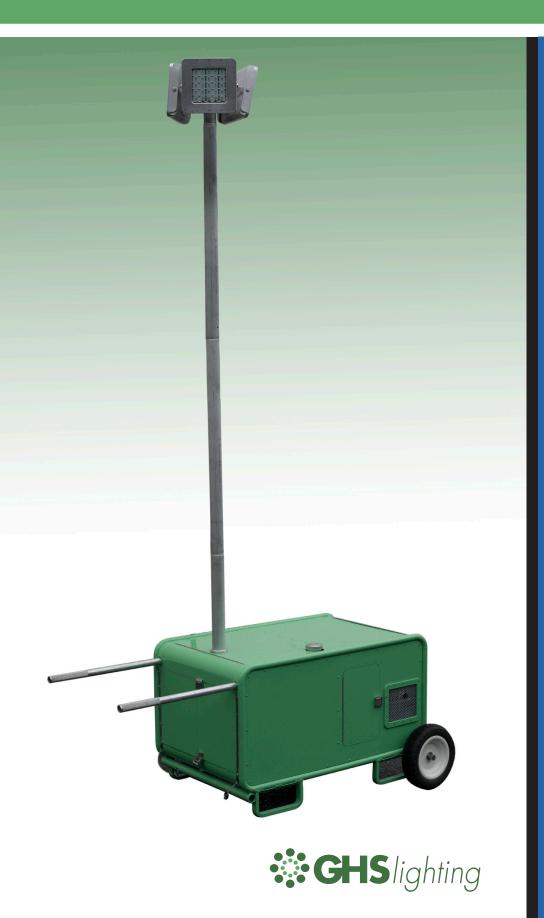

#### **FEATURES**

#### **Tower Base:**

- 4 Cycle 1000W Engine/Genset
- Electrical outlet for additional power usage
- Up to 20+ hour run time
- Low noise <54 DBA @</li>3 meters
- Control panel is inside, away from the elements
- All Accessories are stored in a closed compartment
- Deployable legs with adjustable pads for leveling

### **LED Lighthead:**

- Light fixtures plug into a weatherproof receptacle box inside the control panel
- Lights can be configured for 360 degree lighting or all straight
- LED lights
  - have 50,000 hour life
  - offer instant on/off operation
  - tool-free adjustable
  - heat resistant
  - reduced glare

## Portable Mini Light Tower

SPECIFICATIONS	
Lamps	3 - GHS 25 Mini lights
Deployed Height	3.5 Meters
Genset	Inverter Based
Engine	Yamaha
Receptacles	One 30A/240V
Fuel Capacity	10 Liters
Weight	64 Kg (fully fueled)
Dimensions	Closed 915 x 432 x 432 mm
Transportation	4 detachable handles for 2 man carry 2 wheels for one man handling Fork lift configured

OPTIONS AND ACCESSORIES
Fourth Light available
Custom colors
Can be configured as a 50Hz tower





GHS Lighting LLC, a subsidiary of Marine Electric Systems, Inc.
GHS Lighting™ is a trademark of GHS Lighting LLC
© Copyright 2017, GHS Lighting LLC